

Technical Details


- Dimensions: 109 x 176 x 19mm
- Ports: G1/4"

Box Contents

- 1x Z87 XPower Block
- 1x Grey Thermal Pad
- 2x Blue Thermal Pad




The installation process below is shown without the tubing connected. This has been done so the installation process can be seen clearly. All water cooling components should be connected and leak tested prior to installation into a PC.

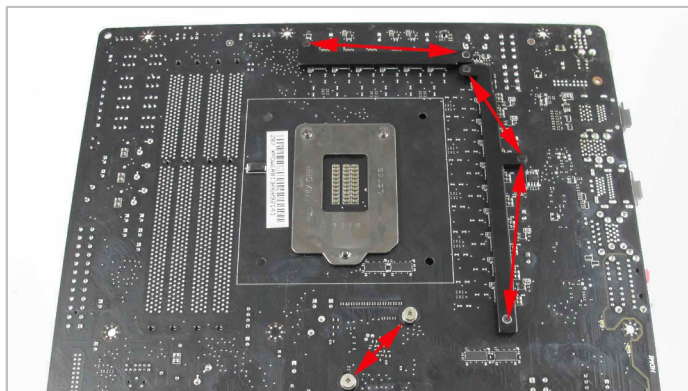

1. Turn the board over and remove the six screws highlighted above. Keep these to one side, they will be needed in step 5.




2. Turn the board back over and slowly remove the stock heat sink from the board. You should be careful not to damage any components on the board.

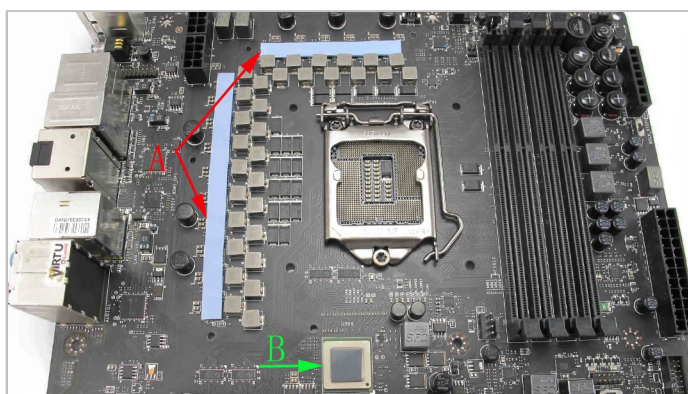


3. Remove the film from both sides and place the blue thermal pads on the positions marked A and the grey pad on the position marked B.



4. Remove the plastic film from the water block and carefully place it into position on the motherboard. You should check the thermal pads are still in position.

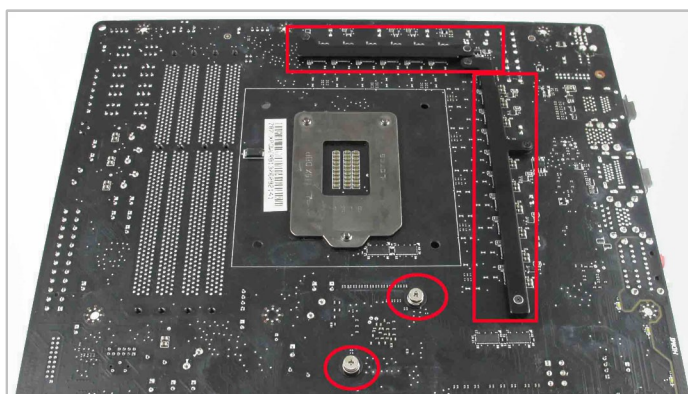

5. With one hand on the block, turn the board back over. Refit the two backplates using the original screws and fit the two screws below the backplates. You should gradually tighten them in turn so even pressure is applied.

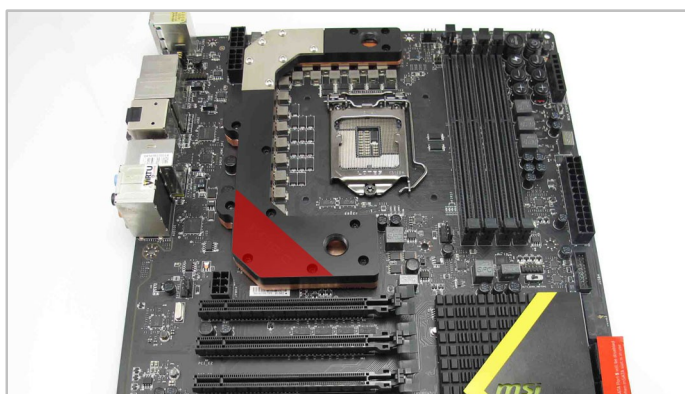

6. The board is now ready for use. When you first boot it is highly advisable to monitor chipset temperatures. If they appear high you may need to remove and refit the block. Finally you can place the optional XSPC badge on the position marked above in red.