

Scissor Lift

Snorkel

www.snorkel.com.au



S1930

- 7.8m maximum working height
- Compact design
- Drives through standard doorways or narrow aisles
- 227kg platform capacity
- 0.9m rollout deck provides a large work area
- Non-marking tyres
- Swing-out trays for easy service
- 24V DC 4.18hp electric motor provides fume free power for extended indoor use
- 19 amp charger - batteries recharge overnight
- The S1930 provides a safe, efficient means of working at height in restricted spaces typically encountered in retail stores, hotels, public buildings or crowded industrial aisles. Its compact size also makes it ideal for applications such as stock picking and storage retrieval while its 1.68m x 0.74m platform provides good work space. When the job is complete, the lift can be quickly lowered and returned to a convenient storage area.

Other Snorkel Work Platforms

Snorkel also manufactures a range of other work platforms including large scissor lifts, vertical masts, trailer boom units, truck mounted boom units, and large telescoping boom machines. Many of these units are available with alternative power sources including 24V DC options.

Truck Mounted Boom



Trailer Mounted Boom



Rough Terrain Scissor Lift



Self Propelled Boom



Snorkel

Your Snorkel Sales Representative
Clint Norgrove

Mobile: 021 774 722

Email: clint@snorkel.co.nz

Manufacturing Plant: 36 Bruce Road, Levin, New Zealand
Telephone: (06) 368-9168
Fascimile: (06) 368-9164



S1930 Scissor Lift

TECHNICAL DATA

PLATFORM	
Height.....	19' (5.8 m)
Size.....	29" x 64" (74 cm x 163 cm)
Rollout Extension.....	36" (91.4 cm)
Platform Length – extended.....	97.5" (247.6 cm)
Capacity.....	500 lbs. (227 kg)
Capacity on Rollout Extension.....	250 lbs. (113.3 kg)
MACHINE DIMENSIONS	
Overall Stowed Height (to Guardrails).....	79" (201 cm)
Overall Width.....	30" (76.2 cm)
Overall Length.....	66" (168 cm)
Weight.....	3,040 lbs. (1,379 kg)
Ground clearance	
At machine center.....	2 1/2" (6.3 cm)
Pothole protection deployed.....	3/4" (1.9 cm)
PERFORMANCE	
Tire size (Solid Rubber).....	12" x 4" (40.6 cm x 12.7 cm)
Drive speed – Stowed.....	2.5 mph (4 km/h)
Drive speed – Raised.....	0.5 mph (0.8 km/h)
Electrical system.....	24 volts
Batteries.....	220 amp-hr
Charger.....	19 amp
Maximum drive height.....	19' (5.8 m)
Turning radius outside.....	64 1/2" (164 cm)
Turning radius inside.....	5" (12.7 cm)

OPTIONS

- Horn
- Flashing Light
- Battery Condition Indicator
- Lanyard Anchors
- Key Switch
- Swing Gate
- AC Generator

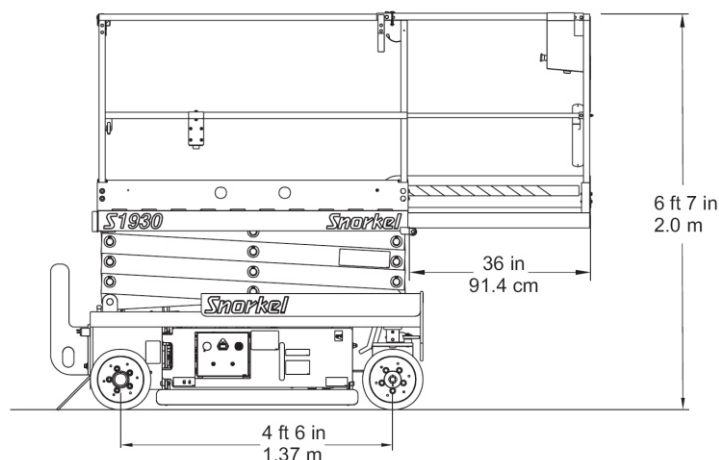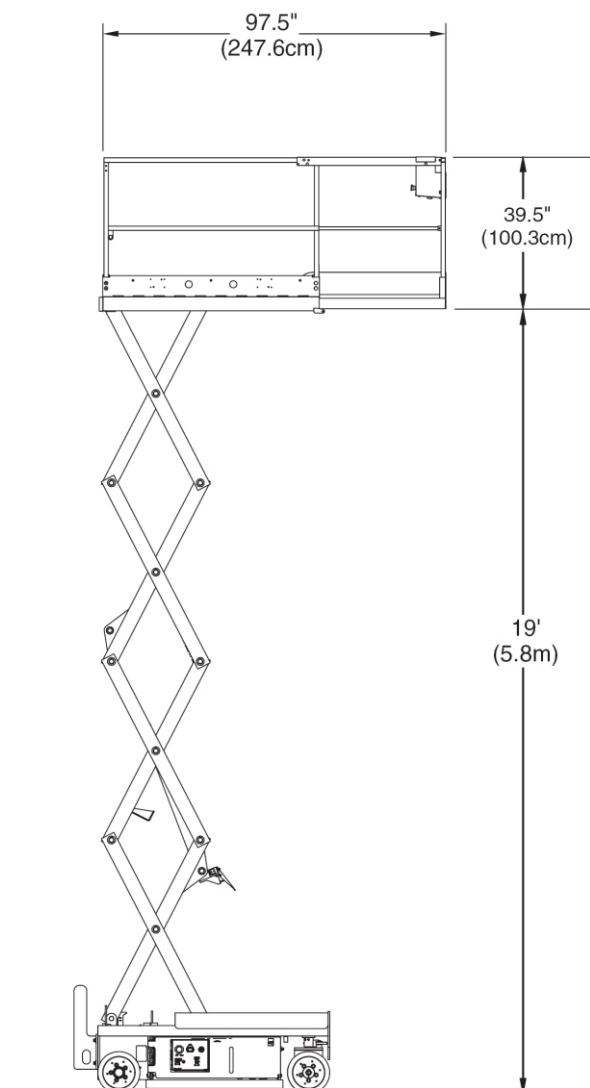

Danger: Standard models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energised conductors which is pointed out on the decals and placards attached to the machine.

Products in this brochure comply with relevant ANSI and Australian Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice.

Snorkel

www.snorkel.com.au